ALLIANCE

10 YEARS WARRANTY
+ 5 YEAR STUBBLE GUARD WARRANTY

ENGINEERED TO COMPETE
VALUE WITHOUT COMPROMISE

AGRI STAR II

NOW WITH ROW CROP SIZES!



- Benchmarked against top-tier radial performers for professional farming applications
- Stratified Layer Technology for field traction and consistent lug engagement
- Wide contact area and overlapping lug design that support soil protection and ride comfort
- Polyester casing construction and wear-resistant compounds designed for long service life
- Stubble Guard compound formulated to reduce cuts, punctures, and tread erosion
- Premium 10-year warranty coverage and an unmatched 1-year Assurance Pledge

R1/R1-W

D/E

H

O&O

AGRI STAR II R-1W

OEM FITMENT




The AGRI STAR II comes with a Stratified Layer technology (SLT) - a unique combination of two layers: The top layer with a single angle profile and bottom layer with a multi-angle profile. After 40% wear of the tire, bottom layer of the lug comes in contact with the ground which leads to increased contact area at the central portion. This leads to better roadability and performance of the tire. The increased amount of rubber volume in AGRI STAR II enhances its stiffness that results in better wear resistance.

PRODUCT CODE	SIZE	ALT.SIZE	PR/LI	TYPE	TREAD DEPTH (32NDS)	PREFERRED RIM	OD (IN)	SW (IN)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED (MPH)
65 SERIES													
46500024	320/65R16	-	117D	TL	42	W10	32.4	12.6	96.5	14.7	2833	35	40
46500022	320/65R18	-	109D	TL	42	W10	34.4	12.6	101.4	15.3	2271	23	40
46500028	340/65R20	-	124D	TL	43	W11	37.4	13.5	113.8	17.3	3527	35	40
46500020	420/65R20	-	135D	TL	48	W13	41.5	16.5	125.6	18.9	4806	35	40
46500023	440/65R20	-	138D	TL	57	W14L	42.5	17.4	127.6	19.2	5203	35	40
46500019	420/65R24	-	138D	TL	54	W13	45.5	16.5	137.9	20.9	5203	46	40
46500017	440/65R24	-	135D	TL	57	W14L	46.5	17.4	142.6	21.5	4806	35	40
46500014	480/65R24	-	140D	TL	59	W15L	48.6	18.9	145.2	22.3	5512	35	40
46500011	540/65R24	-	146D	TL	63	W16L	51.7	20.9	154.0	23.6	6614	35	40
46500001	420/65R28	-	135D	TL	55	W13	49.5	16.5	148.4	22.8	4806	35	40
46500016	440/65R28	-	138D	TL	57	W14L	50.5	17.4	151.3	23.1	5203	35	40
46500012	480/65R28	-	142D	TL	59	W15L	52.6	18.9	158.5	24.1	5842	35	40
46500002	540/65R28	-	149D	TL	63	W16L	55.6	20.9	165.0	25.4	7165	35	40
46500006	600/65R28	-	154D	TL	69	DW20B	58.7	24.1	175.1	26.6	8267	35	40
46500026	540/65R30	-	150D	TL	63	W16L	57.6	20.9	174.5	26.5	7385	35	40
46500015	540/65R34	-	145D	TL	63	W16L	61.7	20.9	185.6	28.0	6393	23	40
46500008	540/65R34	-	152D	TL	63	W16L	61.7	20.9	188.3	28.3	7826	35	40
46500018	600/65R34	-	157D	TL	69	DW20B	64.7	24.1	194.9	29.6	9094	35	40
46500007	540/65R38	-	153D	TL	63	W16L	65.6	20.9	200.2	30.4	8047	35	40
46500021	600/65R38	-	159D	TL	69	DW20B	68.7	24.1	208.3	31.7	9645	35	40
46500027	650/65R38	-	157D	TL	74	DW20B	72.0	25.4	212.9	32.2	9094	23	40
46500005	650/65R38	-	166D	TL	74	DW20B	72.0	25.4	218.3	32.8	11684	41	40
46500004	650/65R38	-	171D	TL	74	DW20B	72.0	25.4	220.0	33.0	13558	52	40
46500010	650/65R42	-	158D	TL	74	DW20B	75.8	25.4	225.8	34.5	9370	23	40
46500003	650/65R42	-	170D	TL	74	DW20B	75.8	25.4	229.8	34.8	13228	46	40
70 SERIES													
47000047	240/70R16	-	104D	TL	38	W8	29.0	9.6	87.0	13.3	1984	35	40
47000037	260/70R16	-	109D	TL	39	W8	30.6	10.3	90.6	13.8	2271	35	40
47000003	280/70R16	-	112D	TL	40	W8L	31.7	11.2	94.4	14.6	2469	35	40
47000000	280/70R18	-	114D	TL	40	W9	33.7	11.2	101.6	15.5	2601	35	40
47000046	260/70R20	-	113D	TL	38	W8	34.3	10.2	101.9	15.6	2535	35	40
47000033	280/70R20	-	116D	TL	40	W9	35.7	11.2	107.4	16.6	2756	35	40
47000027	300/70R20	-	120D	TL	43	W9	37.6	11.8	113.9	17.4	3086	35	40
47000039	320/70R20	-	123D	TL	44	W10	38.8	12.7	115.9	18.0	3417	35	40
47000035	360/70R20	-	129D	TL	53	W11	41.2	14.2	121.2	18.6	4079	35	40
47000008	380/70R20	-	122D	TL	57	W12	42.8	15.0	124.8	19.4	3307	23	40
47000034	320/70R24	-	116D	TL	52	W10	43.2	12.7	127.5	20.0	2756	23	40
47000026	360/70R24	-	122D	TL	53	W11	45.5	14.2	135.2	19.9	3307	23	40
47000001	380/70R24	-	125D	TL	57	W12	47.0	15.2	137.8	21.6	3638	23	40
47000005	420/70R24	-	130D	TL	59	W13	49.2	16.7	145.3	22.0	4189	23	40
47000013	480/70R24	-	138D	TL	64	W15L	52.1	19.0	153.2	23.3	5203	23	40
47000043	360/70R28	-	125D	TL	53	W11	49.3	14.1	146.3	22.4	3638	23	40
47000030	380/70R28	-	127D	TL	57	W12	51.0	15.2	150.1	23.4	3858	23	40
47000002	420/70R28	-	133D	TL	59	W13	53.5	16.7	155.1	24.3	4542	23	40
47000029	480/70R28	-	140D	TL	64	W15L	56.1	19.0	166.1	25.3	5512	23	40
47000025	480/70R28	-	151D	TL	64	W15L	56.1	19.0	169.6	26.2	7606	46	40
47000022	600/70R28	-	161D	TL	69	DW20B	61.2	24.2	183.3	27.9	10196	41	40
47000009	420/70R30	-	134D	TL	59	W13	55.2	16.7	164.0	25.1	4674	23	40
47000032	480/70R30	-	141D	TL	64	W15L	58.3	19.0	173.7	26.3	5677	23	40
47025030	480/70R30	-	150D	TL	64	W15L	58.3	19.0	174.8	27.1	7385	41	40
47000018	480/70R30	-	156D	TL	64	W15L	58.3	19.0	177.6	26.1	8818	55	40
47000042	520/70R30	-	145D	TL	69	W16L	60.5	20.3	177.0	27.1	6393	23	40
47000007	600/70R30	-	152D	TL	69	DW20	63.2	24.2	189.3	28.2	7826	23	40
47000028	480/70R34	-	143D	TL	64	W15L	62.2	19.0	187.3	28.7	6008	23	40
47001541	480/70R34	-	155D	TL	64	W15L	62.2	19.0	188.2	28.8	8543	46	40
47000041	520/70R34	-	148D	TL	69	W16L	64.6	20.5	192.7	29.4	6945	23	40
47025034	520/70R34	-	168D	TL	69	W16L	64.6	20.5	200.3	30.1	12346	70	40
47000038	480/70R38	-	145D	TL	64	W15L	66.2	19.0	199.1	30.6	6393	23	40
47000004	520/70R38	-	150D	TL	69	W16L	68.9	20.5	204.3	31.1	7385	23	40
47000031	580/70R38	-	155D	TL	71	W18L	72.0	22.8	218.7	32.7	8543	23	40

CONTINUED ON NEXT PAGE

AGRI STAR II (continued from previous page)

PRODUCT CODE	SIZE	ALT.SIZE	PR/LI	TYPE	TREAD DEPTH (32NDS)	PREFERRED RIM	OD (IN)	SW (IN)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED (MPH)
47000011	580/70R38	-	180D	TL	71	W18L	72.0	22.8	220.9	33.3	17637	80	40
47000024	580/70R38	-	170D	TL	71	DW18L	72.5	23.1	224.2	33.3	13228	58	40
47000040	710/70R38	-	172D	TL	77	DW23	77.6	28.3	229.6	35.2	13889	35	40
47002588	710/70R38	-	178D	TL	77	DW23	77.1	28.3	234.7	35.9	16535	49	40
47000044	800/70R38	-	173D	TL	76	DW27B	82.1	32.4	239.0	36.4	14330	23	40
47000045	580/70R42	-	158D	TL	73	DW18L	74.0	22.7	221.5	33.5	9370	23	40
47000006	710/70R42	-	173D	TL	77	DW23B	81.1	28.3	244.2	37.5	14330	35	40
85 SERIES													
48500106	280/85R20	11.2R20	112D	TL	49	W10	38.7	11.5	114.4	17.7	2469	23	40
48500022	320/85R20	12.4R20	119D	TL	54	W11	41.5	13.1	122.5	18.9	2998	23	40
48500038	250/85R24	-	109D	TL	49	W8	40.7	9.8	120.7	18.8	2271	23	40
48500020	280/85R24	-	115D	TL	53	W10	43.0	11.9	128.1	19.8	2679	23	40
48500025	320/85R24	-	122D	TL	54	W11	45.5	13.1	134.0	20.7	3307	23	40
48500101	320/85R24	-	142D	TL	54	W11	45.5	13.1	136.3	20.7	5842	67	40
48500035	340/85R24	-	125D	TL	57	W12	47.0	14.0	138.2	21.7	3638	23	40
48500047	380/85R24	-	131D	TL	58	W12	49.6	15.2	143.1	22.2	4299	23	40
48500165	420/85R24	16.9R24	137D	TL	63	W15L	52.3	17.4	153.4	23.8	5071	23	40
48500021	280/85R28	-	118D	TL	53	W10	47.0	11.9	141.1	21.8	2910	23	40
48500410	320/85R28	-	124D 129A6	TT	45	W11	49.8	13.1	145.7	22.7	3527	23	40
48500026	320/85R28	-	124D	TL	54	W11	49.5	13.1	147.2	22.9	3527	23	40
48500040	340/85R28	-	127D	TL	57	W12	51.0	14.0	151.7	23.3	3858	23	40
48500411	340/85R28	13.6R28	127D 132A6	TT	47	W12	51.2	14.1	150.7	23.2	3858	23	40
48500412	380/85R28	-	133 D 138A6	TT	48	W12	54.0	15.2	158.0	24.2	4542	23	40
48500070	380/85R28	14.9R28	133D	TL	58	W12	53.5	15.2	156.1	24.4	4542	23	40
48500413	420/85R28	-	139D 144A6	TT	50	W15L	56.7	17.5	167.7	25.6	5357	23	40
48500190	420/85R28	16.9R28	139D	TL	63	W15L	56.3	17.4	164.4	25.6	5357	23	40
48500071	380/85R30	14.9R30	135D	TL	58	W12	55.5	15.2	165.8	25.3	4806	23	40
48500200	420/85R30	-	140D	TL	63	W15L	58.0	17.4	170.7	26.7	5512	23	40
48500140	460/85R30	18.4R30	145D	TL	67	W16L	61.0	18.9	180.1	27.0	6393	23	40
48500141	460/85R30	18.4R30	148D	TL	67	W16L	61.0	18.9	180.1	27.0	6950	23	40
48500032	320/85R32	-	126D	TL	54	W11	53.5	13.1	161.2	24.8	3748	23	40
48500103	320/85R34	-	133D	TL	53	W11	55.4	12.6	164.8	25.8	4542	35	40
48500037	380/85R34	14.9R34	137D	TL	58	W11	59.4	15.2	177.8	27.5	5071	23	40
48500100	420/85R34	-	142D	TL	63	W15L	62.0	17.4	188.1	28.7	5842	23	40
48504730	420/85R34	-	147D	TL	63	W15L	62.0	17.4	188.1	28.7	6779	35	40
48500151	460/85R34	-	157D	TL	67	W15L	64.8	18.9	196.7	29.7	9094	44	40
48500145	460/85R34	18.4R34	147D	TL	67	DW16L	64.8	18.9	190.9	29.6	6779	23	40
48500033	320/85R36	-	128D	TL	54	W11	57.7	13.1	172.1	26.8	3968	23	40
48500001	320/85R36	-	147D	TL	54	W11	57.5	13.1	178.1	27.1	6779	64	40
48500044	340/85R36	-	132D	TL	57	W12	59.0	14.0	175.8	27.4	4409	23	40
48500031	320/85R38	-	143D	TL	54	W11	59.5	13.1	180.5	28.1	6008	52	40
48500046	340/85R38	-	133D	TL	57	W12	61.0	14.0	185.3	28.6	4542	23	40
48500048	340/85R38	-	151D	TL	57	W12	61.0	14.0	185.3	28.6	7606	64	40
48500121	380/80R38	-	152D	TL	58	W12	62.0	15.2	190.0	29.0	7826	58	40
48500120	380/80R38	14.9R38	142D	TL	58	W12	62.0	15.2	189.9	29.1	5842	35	40
48500409	380/85R38	-	144D	TL	58	W12	63.4	15.0	190.6	29.5	6173	35	40
48500130	420/85R38	-	144D	TL	63	W15L	66.1	17.4	194.8	30.4	6173	23	40
48500160	460/85R38	-	149D	TL	67	DW15L	68.8	18.9	204.5	31.4	7165	23	40
48500167	460/85R38	-	167D	TL	67	DW15L	68.8	18.9	212.4	32.3	12015	64	40
48500300	520/85R38	-	155D	TL	69	DW16L	72.8	20.5	214.0	32.9	8543	23	40
48500301	520/85R38	-	169D	TL	69	DW16L	72.8	20.5	222.0	33.6	12787	52	40
48500125	650/85R38	-	173D	TL	77	DW23B	81.6	26.8	244.1	37.1	14330	35	40
48500325	480/80R42	-	151D	TL	68	DW16L	72.0	19.4	213.9	33.2	7606	23	40
48500326	480/80R42	-	169D	TL	68	DW16L	72.0	19.4	213.9	33.2	12787	64	40
48500110	520/85R42	-	157D	TL	69	DW16L	77.0	20.5	229.3	35.2	9094	23	40
48500334	520/85R42	-	169D	TL	69	DW16L	77.0	20.5	235.7	35.8	12787	52	40
48500104	420/80R46	16.9R46	159D	TL	64	W13	72.4	16.5	220.4	33.9	9645	52	40
48500260	480/80R46	18.4R46	158D	TL	68	DW16L	77.2	19.5	231.2	35.8	9370	35	40
48500360	520/85R46	-	158D	TL	69	DW16L	81.0	20.5	241.0	37.0	9370	23	40
48500361	520/85R46	-	169D	TL	69	DW16L	81.0	20.7	243.6	37.6	12787	46	40
48500264	480/80R50	-	159D	TL	68	DW16L	81.1	19.5	242.0	36.7	9645	35	40
90-95 SERIES													
49000002	420/90R30	16.9R30	147D	TL	63	DW13	59.8	16.5	175.9	27.0	6779	35	40
49000001	320/90R42	12.5R42	147D	TL	54	W10	64.7	12.6	196.4	30.4	6779	58	40
49500001	210/95R16	-	106D	TL	34	W7	31.7	8.4	93.7	14.3	2094	35	40
49500002	210/95R18	-	108D	TL	38	W7	34.0	8.3	100.7	15.5	2205	35	40

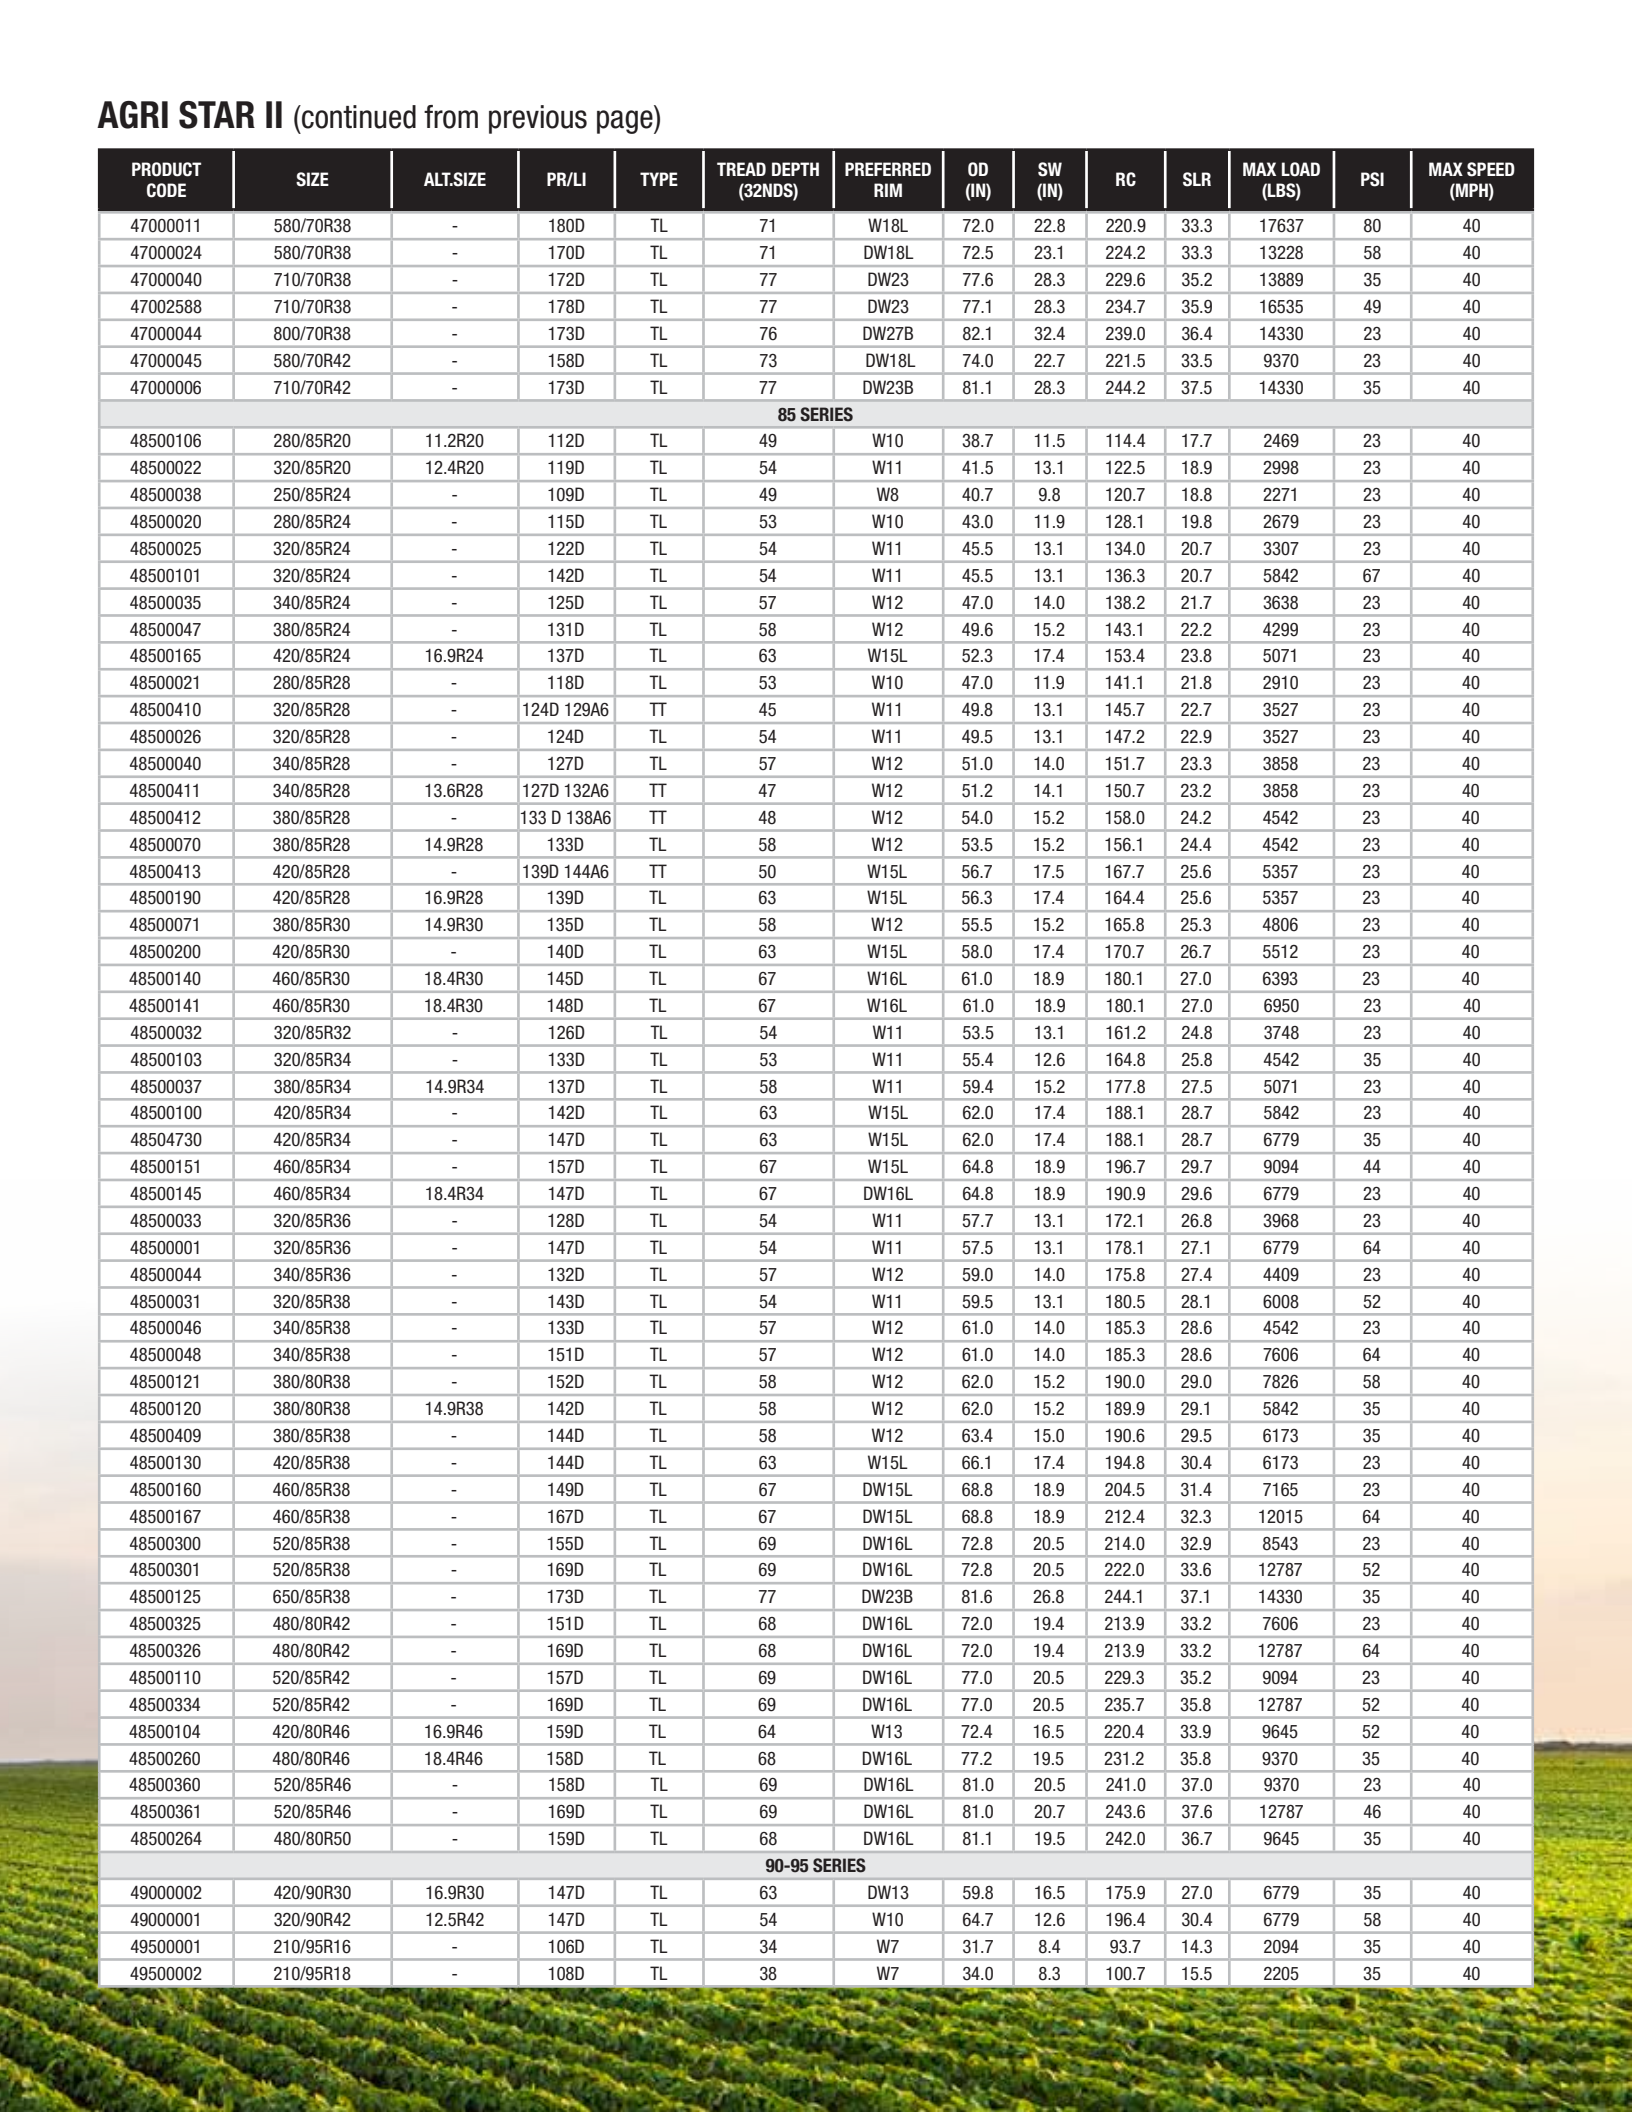

AGRI STAR II ROW CROP R-1

OEM FITMENT



The Alliance Agri Star II - Row Crop is designed with driver comfort as a top priority. It offers effortless mobility and superior roadability, enhanced by its polyester casing for stability and high load capacity. The dual-step tie bars provide efficient self-cleaning, while the 5-spoke sidewall ensures durability and style. Backed by a 10-year warranty, this tire delivers reliable performance on all terrains, ensuring comfort every mile.

PRODUCT CODE	SIZE	ALT.SIZE	PR/LI	TYPE	TREAD DEPTH (32NDS)	PREFERRED RIM	OD (IN)	SW (IN)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED (MPH)
45045026	230/95R24	9.5R24	108D 104E	TL	42	W7	41.2	8.8	121.4	18.7	2205	23	40
45045008	230/95R28	-	110D 107E	TL	42	W7	45.2	8.8	134.0	20.8	2337	23	40
45045023	210/95R32	-	117D 114E	TL	40	W7	48.0	8.3	146.0	22.6	2832	41	40
45045001	230/95R32	-	128D 125E	TL	42	W7	49.4	8.9	151.2	23.0	3970	58	40
45045004	270/95R32	11.2R32	136D 133E	TL	44	W9	52.2	10.7	160.5	24.7	4940	58	40
45045033	210/95R36	-	119D 116E	TL	40	W7	51.7	8.3	158.2	24.3	2998	41	40
45045030	230/95R36	9.5R36	130D 127E	TL	42	W7	53.4	8.8	164.0	25.0	4190	58	40
45045021	270/95R36	11.2R36	139D 136E	TL	44	W9	56.4	10.8	172.4	26.4	5360	58	40
45045019	270/95R38	11.2R38	140D 137E	TL	44	W9	58.4	10.8	178.1	27.4	5510	58	40
45045013	230/95R40	9.5R40	132D 128E	TL	42	W8	57.2	9.2	177.2	26.8	4409	58	40
45045028	230/95R42	-	133D 130E	TL	42	W7	59.3	8.8	183.0	28.0	4542	58	40
45045012	270/95R42	11.2R42	140D 137E	TL	44	W8	62.4	10.3	189.4	29.3	5510	52	40
45045005	230/95R44	-	134D 131E	TL	50	W7	61.3	8.8	189.7	29.0	4670	58	40
45045016	270/95R44	11.2R44	142D 139E	TL	53	W9	64.4	10.8	198.3	30.2	5842	58	40
45045010	270/95R46	11.2R46	141D 138E	TL	44	W10	66.3	11.2	203.7	31.4	5680	52	40
45045006	300/95R46	-	148D 145E	TL	47	W10	68.4	11.9	209.1	32.3	6945	58	40
45045034	320/90R46	-	148D 145E	TL	47	W10	68.9	12.6	208.6	32.4	6945	52	40
45045017	340/85R46	13.6R46	150D 147E	TL	56	W12	69.0	13.7	212.8	32.6	7385	52	40
45045032	380/90R46	-	173D 170E	TL	59	W12	73.0	15.0	222.5	34.1	14330	90	40
45045035	380/90R46	-	159D 156E	TL	59	W12	73.0	15.0	221.9	34.2	9645	58	40
45045014	230/95R48	-	136D 133E	TL	42	W7	65.2	8.8	202.4	31.0	4940	58	40
45045011	270/95R48	11.2R48	142D 139E	TL	44	W9	68.2	10.8	209.3	32.4	5840	52	40
45045009	340/85R48	-	156D 153E	TL	47	W12	71.0	13.7	217.2	33.2	8818	67	40
45045007	320/90R50	-	150D 147E	TL	56	W10	72.8	12.4	218.6	34.4	7390	52	40
45045002	380/90R50	-	158D 155E	TL	59	W12	77.0	14.7	235.2	36.0	9370	52	40
45045031	380/90R50	-	151D 148E	TL	59	W12	77.0	14.7	230.0	35.9	7606	35	40
45045024	380/105R50	-	168D 165E	TL	50	W12	81.4	15.0	248.0	37.7	12350	64	40
45045015	300/95R52	-	149D 146E	TL	47	W10	74.4	12.0	228.6	35.0	7165	52	40
45045020	300/95R52	-	156D 153E	TL	47	W10	74.4	11.9	233.3	30.2	8818	70	40
45045018	270/95R54	11.2R54	146D 143E	TL	44	W9	74.3	11.2	226.2	35.4	6614	58	40
45045022	270/95R54	11.2R54	156D 153E	TL	44	W9	74.3	10.7	230.3	35.4	8818	81	40
45045003	320/90R54	-	151D 148E	TL	56	W10	76.9	12.8	234.4	36.5	7606	52	40
45045027	380/90R54	-	152D 149E	TL	59	W12	81.0	15.0	243.6	37.8	7826	35	40
45045029	380/90R54	14.9R54	171D 168E	TL	59	W12	81.0	15.0	246.8	38.1	13558	78	40

AGRI STAR II 403



Alliance Agri Star II 403 is equipped with a 4-Multi Ribs pattern, the Agri Star II ensures enhanced steerability. Prioritizing longevity and comfort, this tire features exceptional on-road wear resistance, superior driving comfort making it an indispensable companion for modern farming and haulage application. An ideal front tire to pair up with the tractor rear radial tires, Agri Star II promises the best performance.

PRODUCT CODE	SIZE	ALT.SIZE	PR/LI	TYPE	TREAD DEPTH (32NDS)	PREFERRED RIM	OD (IN)	SW (IN)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED (MPH)
40300001	7.50R16	-	102A8	TT	26	5.50F	31.7	8.1	95.2	14.7	1874	46	25

ALLIANCE AGRI STAR II ASSURANCE PLEDGE

TRY THEM FOR A YEAR, TRUST THEM FOR TEN!

The Alliance Agri Star II is backed by an unprecedented 1-year assurance pledge. If you don't absolutely love the performance and value of your Agri Star II tires, bring them to the dealer where they were originally purchased and you'll be issued a 100% credit toward the purchase of the same-size replacement tires.*

scan for more info

VISIT YOKOHAMA-ATG.COM FOR DETAILED LOAD AND PRESSURE TABLES

Distributor:

ALLIANCE
ENGINEERED TO KEEP YOU AHEAD

With a rich legacy spanning over 70 years, Alliance is a leading name in the commercial tire sector. Through continuous innovation and advanced research, Alliance has been consistently offering top-tier products engineered to optimize productivity across applications. With state-of-the-art manufacturing facilities and robust research capabilities, Alliance has earned the reputation of offering a comprehensive value-driven portfolio of agricultural tires catering to diverse needs, making it the preferred choice of customers worldwide.

Yokohama Off-Highway Tires America, Inc. | 201 Edgewater Drive, Suite 285, Wakefield, MA 01880 | (800) 343-3276

Alliancetires @Yokohama-ATG alliance.tires